


This drawing, specifications, and concepts contained here in are the sole property of Dart Aerospace, and may not be reproduced or used in any fashion without the prior written permission of Dart Aerospace Eugene, OR.

REVISIONS					
REV	ECR	DESCRIPTION	DATE	INITIAL	APPROVED
1		RELEASED FOR PRODUCTION.	7/10/2017	DPD	JAG

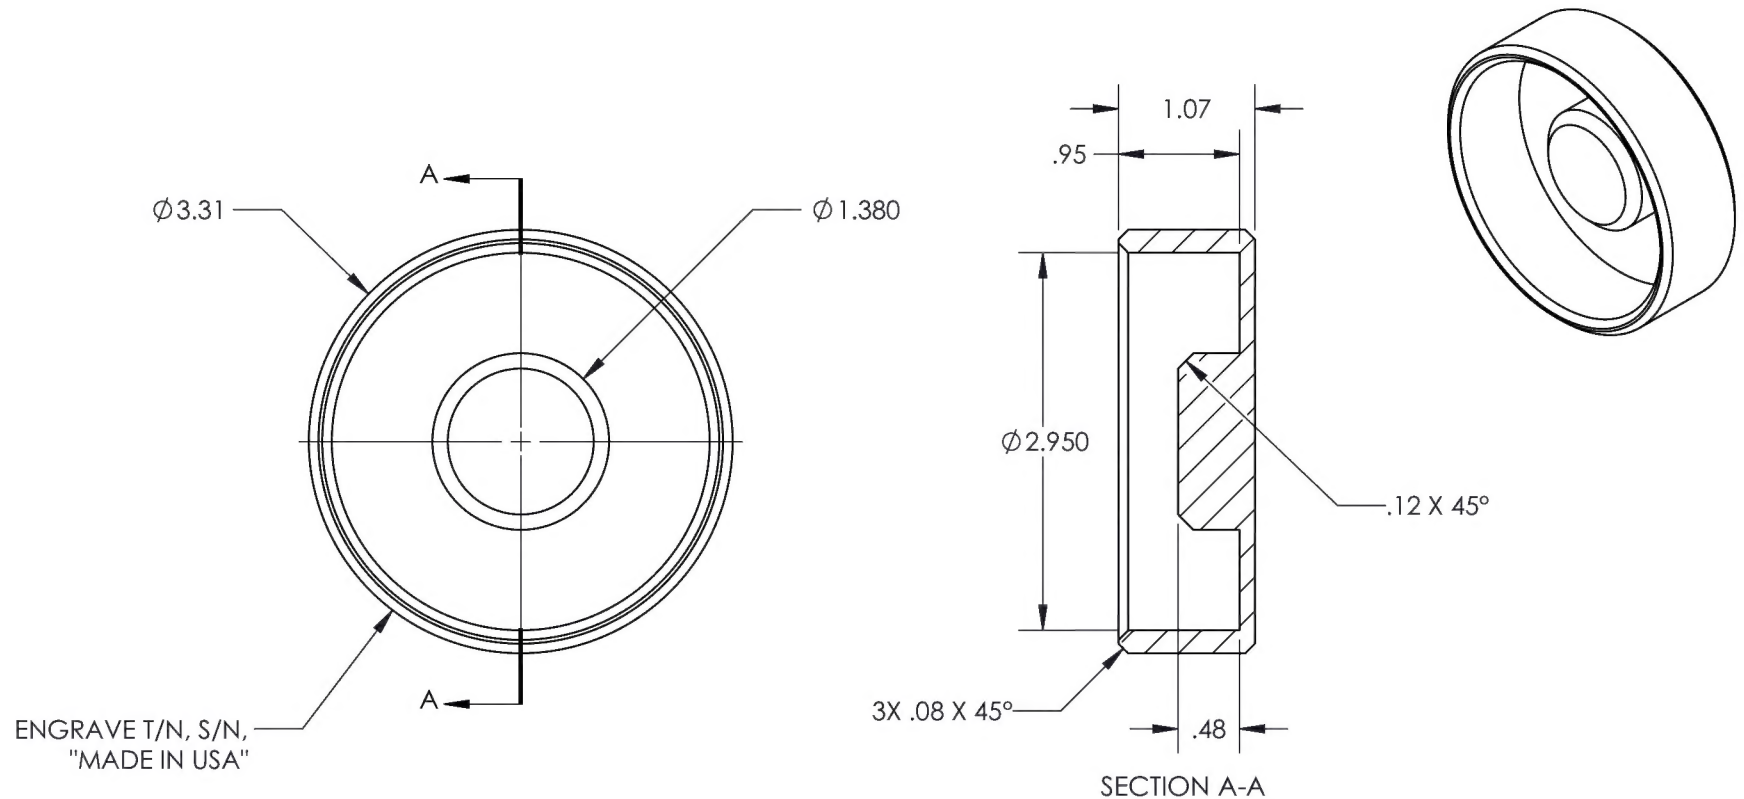

NOTE:  
REF. AIRBUS T/N: 117-12250W15.

<b>DART AEROSPACE</b>																									
TITLE <b>MOUNT</b>																									
DWG NO. <b>RBE117-12250W15</b>	REV <b>1</b>																								
<table border="0"> <tr> <td>MAT'L 1018/1020 CR</td> <td>UNLESS OTHERWISE SPECIFIED</td> </tr> <tr> <td>HEAT TREAT</td> <td>DIMENSIONS ARE IN INCHES</td> </tr> <tr> <td>FINISH BLACK OXIDE</td> <td>.XXX ± .005 FRACTIONS ± 1/8</td> </tr> <tr> <td>SPEC ASTM B633 TYPE I SC 2</td> <td>.XX ± .01 ANGLES ± 5°</td> </tr> <tr> <td>DRAWN BY: DD 06/26/2017</td> <td>.X ± .1 SURFACES = 125°</td> </tr> <tr> <td>CHECKED: RJC 06/27/2017</td> <td>1. BREAK ALL SHARP EDGES</td> </tr> <tr> <td>OPPS APPR: AA 07/10/2017</td> <td>.015 x 45° OR .015R</td> </tr> <tr> <td>QA APPR: JL 07/10/2017</td> <td>2. DIMENSIONAL LIMITS APPLY</td> </tr> <tr> <td>APPROVED: JAG 07/10/2017</td> <td>AFTER PLATING</td> </tr> <tr> <td>SCALE 2:3</td> <td>3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009</td> </tr> <tr> <td>DATE 6/26/2017</td> <td>USED ON MODEL</td> </tr> <tr> <td>SHEET 1 OF 1</td> <td>EC145, EC645, H145, H145M</td> </tr> </table>		MAT'L 1018/1020 CR	UNLESS OTHERWISE SPECIFIED	HEAT TREAT	DIMENSIONS ARE IN INCHES	FINISH BLACK OXIDE	.XXX ± .005 FRACTIONS ± 1/8	SPEC ASTM B633 TYPE I SC 2	.XX ± .01 ANGLES ± 5°	DRAWN BY: DD 06/26/2017	.X ± .1 SURFACES = 125°	CHECKED: RJC 06/27/2017	1. BREAK ALL SHARP EDGES	OPPS APPR: AA 07/10/2017	.015 x 45° OR .015R	QA APPR: JL 07/10/2017	2. DIMENSIONAL LIMITS APPLY	APPROVED: JAG 07/10/2017	AFTER PLATING	SCALE 2:3	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009	DATE 6/26/2017	USED ON MODEL	SHEET 1 OF 1	EC145, EC645, H145, H145M
MAT'L 1018/1020 CR	UNLESS OTHERWISE SPECIFIED																								
HEAT TREAT	DIMENSIONS ARE IN INCHES																								
FINISH BLACK OXIDE	.XXX ± .005 FRACTIONS ± 1/8																								
SPEC ASTM B633 TYPE I SC 2	.XX ± .01 ANGLES ± 5°																								
DRAWN BY: DD 06/26/2017	.X ± .1 SURFACES = 125°																								
CHECKED: RJC 06/27/2017	1. BREAK ALL SHARP EDGES																								
OPPS APPR: AA 07/10/2017	.015 x 45° OR .015R																								
QA APPR: JL 07/10/2017	2. DIMENSIONAL LIMITS APPLY																								
APPROVED: JAG 07/10/2017	AFTER PLATING																								
SCALE 2:3	3. INTERPRET DIM AND TOL PER ASME Y14.5M-2009																								
DATE 6/26/2017	USED ON MODEL																								
SHEET 1 OF 1	EC145, EC645, H145, H145M																								

ASSY QTY	ASSY QTY	B/O	Part #	UNIT QTY	Description	Material	B/O INFORMATION OR SPECIFICATIONS
				1	MOUNT	1018/1020 CR	